

BONNEVILLE
SOLUTIONS

BY KP BUILDING PRODUCTS LTD

7000 Series Lift & Slide System







Lift & Slide: Bridging Spaces, Embracing Freedom.



Comfort



Thermal Insulation



Sound Insulation



Watertightness

The lift and slide system which is available in sizes up to 20 ft wide and 12ft tall, provides uninterrupted panoramic views, delivers comfort and expands your living or working space.

Experience the freedom of creating a larger, more open environment that enhances both aesthetics and functionality.



Security

With the door in locked position the multi-point locks will make contact in several locations the number varies depending on the door size, the sash panels will also be securely resting on the sill making it very difficult to move due to the weight.

Assembly

The knocked down frame and individual sashes help facilitate transportation and installation of large door systems.

Energy Performance

The 70MM sash profile and multiple glass stop profiles allows for a wide variety of single, dual, and triple glazed glass combinations providing better energy performance.


Structural Performance

Metal reinforced profiles enable the door system to be used in wide openings where the wind load requirement is high.

Door Operation

With the locking handles in the closed position the sashes rest on the track compressing the seals, making the door air tight.

Turning the handles to the open position engages its bogie wheels raising the sash which allows the door to open and close effortlessly.

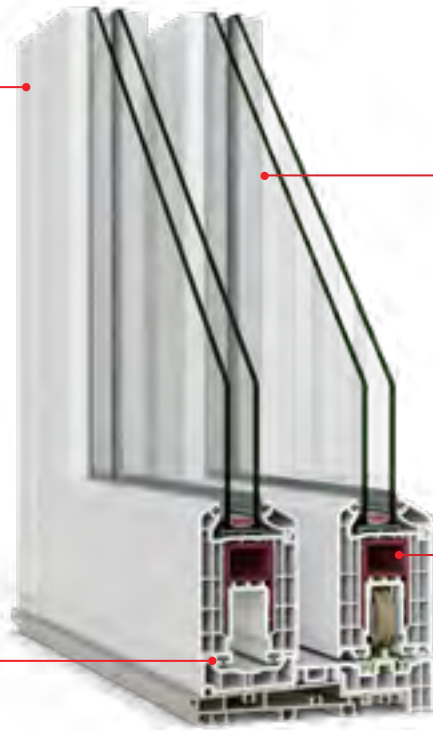



7000 SERIES / LIFT AND SLIDE SYSTEM TECHNICAL PROPERTIES

PERFORMANCE CLASSIFICATION: LC/PG 35 - SIZE TESTED 184.0 X 96.0"

Properties	Lift and Slide
 Jamb Depth	6 5/8"
 Overall Thermal Unit Thickness	15/16 to 2
 Glass Thickness (mm)	4 to 40
 Air Tightness	A3
 Wind Load Resistance	1680 Pa
 Water Penetration Resistance	440 Pa

APPLICATION FEATURES



Sash Load Capacity
882 lb accessories
16.4 lb/ft2 glass




Sash Rebate Width
min. 28" -
max. 118"



Sash Rebate Height
min. 24" -
max. 122"

TYPES OF OPENINGS




MAXIMUM SIZES:

2 panel:
236" (19'8") x 95 1/2" (8'). Knocked down
191" (15.91') x 122" (10')

4 panel:
252" (21') x 122" (10').

COLOUR OPTIONS

PVC Profile Colours



White





Grey




Cream White

Laminated Colour/Pattern Options

 PX-20 Black Ulti-Matt	 MX-92 Platin	 MX-11 Gale Grey	 MX-16 Anthracite Grey	 MX-64 Quartz Grey
 MX-21 Trompet	 MX-15 Walnut	 MX-23 Cottony Winchester	 PX-98 Siena	 MX-02 Dark Oak
 MX-91 Soft Cherry	 MX-04 Golden Oak	 MX-24 Winchester	 MX-14 Anteak	 FX90 Aluminum Brush

* Please contact our sales team for other laminated colour options.



BONNEVILLE

SOLUTIONS

BY KP BUILDING PRODUCTS LTD